

PATTERNING METHOD WITH MICRO-CONTACT PRINTING  
AND ITS PRINTED PRODUCT

BACKGROUND OF THE INVENTION

(1) Field of the Invention

The present invention relates to a patterning method ~~with~~for micro-contact printing which makes it possible to form micro-contact printed patterns with a size as large as a molecule used in the production of a variety of functional molecular ~~device~~devices and a DNA chip and printed product obtained by this method.

(2) Description of the Prior Art

In the field of molecular chemistry, L. Carter proposed the concept of a molecular device in 1982. Research and development in this field has been actively carried out in enterprise, university and research institutes since that time. For example, if ~~the~~a specific function is given to each ~~of~~organic ~~molecules~~molecule, respectively and an assembly of these organic molecules is formed, the assembly of organic molecules makes possible the formation of a semiconductor device with a super-high integrated density such that there is no comparison between the integrated density of a semiconductor device formed of the assembly of organic molecules and that of a conventional semiconductor ~~device~~device. Further, in recent years, the genome analysis of DNA has been actively studied and the so-called biochip has attracted the attention of people. The application thereof is also thought for the development of the biochip.

On the other hand, in photolithography employed until now as a method of reproducing micro-contact printed patterns, there is ~~the~~a limit for the reproduction of micro-contact printed patterns, in respect of mass-production of micro-contact printed

patterns being made in a short time, since ~~the~~a substrate with desired micro-contact printed patterns should be reproduced through several steps. Further, ~~the~~photolithography is not suited for materials with a low heat resistance and low mechanical resistance such as cells, DNA and enzymes, since ~~the~~photolithography is carried out through complicated steps such as exposure, development and etching. Further, printing method makes possible the production of massive printed products. However, the reproduction of micro-contact printed patterns of the order of hundreds  $\mu\text{m}$  is the limit until now. Accordingly, a printing method is not suited for the reproduction of micro-contact printed patterns.

~~Inventers~~Inventors of the present invention previously invented a method of reproducing micro-contact printed patterns comprising the steps of: forming patterns of molecules with ~~the~~a polarity on a substrate using molecular ink including molecules with ~~the~~a fixed polarity dispersed in a solvent to form a first transfer layer and, forming patterns of molecules with the same polarity as the above-mentioned polarity or ~~the~~a different polarity from the above-mentioned polarity on the substrate using molecular ink including molecules with the same polarity as the above-mentioned polarity or the different polarity from the above-mentioned polarity (Japanese patent application No. 2000-151157).

However, in the above-mentioned method, the density of the ink used is lowered for increasing the resolving power. The film of the first transfer layer has defects since the first transfer layer is transferred using an ink with a thin density. When the second transfer layer is formed, the ink for the second transfer layer comes in and contaminates the first transfer layer formed previously because an area of the first transfer layer is not covered completely with ink for the first transfer

layer, so that the contrast between the first transfer layer and the second transfer layer is lowered.

Further, there is a problem that if the density of the ink for the first transfer layer is increased in order to remove defects of the first transfer layer in forming the first transfer layer, the ~~run~~running and ~~spread~~spreading of ink occurs so that the resolving power is lowered.

#### BRIEF SUMMARY OF THE INVENTION

It is an object of the present invention to provide a patterning method ~~with~~for micro-contact printing which makes it possible to form briefly micro-contact printed patterns of a molecular level with ~~the~~a contrast between a printed area and an unprinted area around the printed area, and its printed product.

~~Invention mentioned in claim 1~~The present invention, which solves the problem concerning a patterning method ~~with~~for micro-contact printing, is characterized by a patterning method ~~with~~for micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin~~and~~ ~~thereafter;~~ removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophobic molecules dispersed in a solvent on the stamp~~and;~~ forming micro-contact printed patterns of a hydrophobic molecular layer on a substrate by means of the stamp on which the molecular ink is applied~~and;~~ and dipping the substrate with micro-contact printed patterns in a hydrophilic molecule solution dispersed in a solvent to give chemical modification to the areas of the surface of the substrate around the micro-contact printed patterns, wherein a solution including hydrophilic molecules having a chain length shorter than the chain length of the hydrophobic molecules included in the

molecular ink is used as the hydrophilic molecule solution.

According to the present invention, micro-contact printed patterns formed of a hydrophobic molecular layer are formed on a substrate using a hydrophobic molecular ink including hydrophobic molecules dispersed in a solvent, and the so-called micro-contact printed patterns are formed of hydrophobic molecules having a chain length longer than the chain length of the hydrophilic molecules. Accordingly, in case that hydrophobic molecular layer has defects, when dipping an area of the substrate uncovered with the hydrophobic molecular layer, namely, an unprinted area into a hydrophilic solution, the hydrophilic solution comes in the defects. However, even in this case, since the hydrophilic molecules coming in the defects are covered with the hydrophobic molecules having a chain length longer than that of the hydrophilic molecules, the high contrast between micro-contact printed patterns and unprinted area of hydrophilic molecules can be obtained without the hydrophobic property of the micro-contact printed patterns being damaged.

~~Invention mentioned in claim 17~~An embodiment of the present invention, which solves the problem concerning a printed product, is characterized by a printed product provided with micro-contact printed patterns of a hydrophobic ~~molecules~~molecule layer formed on a substrate using a molecular ink including hydrophobic molecules dispersed in a solvent and with a hydrophilic molecule layer formed on areas of the surface of the substrate around the micro-contact printed patterns, wherein the chain length of hydrophilic ~~molecule~~molecules is shorter than the chain length of hydrophobic molecules.

~~Invention mentioned in claim 20~~Another embodiment of the present invention, which solves the problem

concerning a patterning method ~~with~~for micro-contact printing, is characterized by a patterning method ~~with~~for micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin and thereafter removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophilic molecules dispersed in a solvent on the stamp ~~and~~; forming micro-contact printed patterns of hydrophilic molecular layer on a substrate by means of the stamp on which the molecular ink is applied ~~and~~; and dipping the substrate with micro-contact printed patterns in a hydrophobic molecule solution including hydrophobic molecules dispersed in a solvent to give chemical modification to areas of the surface of the substrate around the micro-contact printed patterns, wherein a solution including hydrophobic molecules having a chain length shorter than the chain length of hydrophilic molecules included in the molecular ink is used as the hydrophobic molecule solution.

According to the inventive patterning method ~~with~~for micro-contact printing ~~as mentioned in claim 20~~, a hydrophobic molecular layer is formed on an area of a substrate around micro-contact printed patterns of a hydrophilic molecular layer formed on a substrate using hydrophilic molecular ink including hydrophilic molecules dispersed in a solvent. Accordingly, in case ~~that~~the hydrophobic molecular layer has defects, when dipping an area of the substrate uncovered with the hydrophilic molecular layer, namely an unprinted area into hydrophobic solution, the hydrophobic solution comes in the defects. However, even in this case, since the hydrophobic molecules coming in the defects are covered with the hydrophilic molecules having a chain length longer than that of the hydrophobic molecules, the high contrast between micro-contact printed patterns and

unprinted area of hydrophobic molecules can be obtained without the hydrophilic property of micro-contact printed patterns being damaged.

~~Invention mentioned in claim 36~~The present invention, which solves the problem concerning a printed product, is characterized by a printed product with micro-contact printed patterns of a hydrophilic molecule layer formed on a substrate using a molecular ink including hydrophilic molecules dispersed in a solvent and with a hydrophobic ~~molecules~~molecule layer formed on areas of the surface of the substrate around the micro-contact printed patterns, wherein the chain length of hydrophobic molecules is shorter than the chain length of hydrophilic molecules.

~~Invention mentioned in claim 39~~The present invention is also characterized by a patterning method ~~with~~for micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin and thereafter removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophobic molecules dispersed in a solvent on the stamp ~~and~~; forming micro-patterns of a hydrophobic molecular layer on a substrate by means of the stamp on which the molecular ink is applied ~~and~~; and dipping the substrate with micro-contact printed patterns in a hydrophilic molecule solution including hydrophilic molecules dispersed in a solvent to give chemical modification to areas of the surface of the substrate around the micro-contact printed patterns, wherein after forming the micro-contact printed patterns, chemical modification is given to the areas of the surface of the substrate around the micro-contact printed patterns by the hydrophilic molecular ink in the water.

According to the inventive patterning method ~~with~~for micro-contact printing ~~invention mentioned in claim 39~~,

after forming the micro-contact printed patterns of a hydrophobic molecular layer on a substrate using a molecular ink including hydrophobic molecules dispersed in a solvent, chemical modification is given to the areas of the surface of the substrate around the micro-contact printed patterns by the hydrophilic molecular ink in the water under such a state that the hydrophobic molecules are bonded with each other with hydrophobic ~~bond~~bonds in the water, so that the probability that hydrophilic molecules come in the hydrophobic molecular layer is low. Accordingly, the high contrast between micro-contact printed patterns and an area of the substrate around the micro-contact printed patterns to which the chemical modification is given with the hydrophilic molecular ink can be obtained without the hydrophobic property of the micro-contact printed patterns being damaged.

~~Invention mentioned in claim 41~~The present invention, which solves the problem concerning a patterning method ~~with~~for micro-contact printing, is characterized by a patterning method ~~with~~for micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin ~~and thereafter~~; removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophilic molecules dispersed in a solvent on the stamp ~~and~~; forming micro-contact printed patterns formed of a hydrophilic molecular layer on a substrate by means of the stamp on which the hydrophilic molecular ink is applied ~~and~~; and dipping the substrate with micro-contact printed patterns in a hydrophilic molecule solution including hydrophilic molecules dispersed in a solvent to give chemical modification to areas of the surface of the substrate around the micro-contact printed patterns, wherein after forming the micro-contact printed patterns, chemical

modification is given to the areas of the surface of the substrate around the micro-contact printed patterns by the hydrophobic molecular ink in an organic solution.

According to the inventive patterning method ~~with~~for micro-contact printing ~~invention mentioned in claim 41,~~ after forming the micro-contact printed patterns of a hydrophilic molecular layer on a substrate using a molecular ink including hydrophilic molecules dispersed in a solvent, a hydrophobic molecular ink is applied on the areas of the surface of the substrate around the micro-contact printed patterns in an organic solution, so that the probability that hydrophilic molecules come in the hydrophobic molecular layer is low. Accordingly, the high contrast between micro-contact printed patterns and an area of the substrate around the micro-contact printed patterns can be obtained without the hydrophobic property of micro-contact printed patterns being damaged.

~~Invention mentioned in claim 60~~An embodiment of the present invention, which solves the problem concerning a printed product, is characterized by a printed product provided with micro-contact printed patterns of a hydrophobic molecular layer formed on a substrate using a hydrophobic molecular ink including hydrophobic molecules and a hydrophilic molecular layer formed on areas of the surface of the substrate around the micro-contact printed patterns, wherein the printed product is produced utilizing the properties of the hydrophobic molecules of the micro-contact printed patterns being cohesive by cohesive connection in the water.

~~Invention mentioned in claim 61~~An embodiment of the present invention, which solves the problem concerning a printed product, is characterized by a printed product provided with micro-contact printed patterns of a hydrophilic molecular layer formed on a substrate using a hydrophilic molecular ink including hydrophilic molecules



and a hydrophilic molecular layer formed on areas of the surface of substrate around the micro-contact printed patterns, wherein the printed product is produced utilizing the properties of hydrophilic molecules of the micro-contact printed patterns being cohesive by hydrogen connection in the organic solution.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1(a) through (f) is a schedule drawing showing the steps for forming micro-contact printed patterns having a first transfer layer and a second transfer layer on a substrate.

Figs. 2(a) and (b) are explanatory drawings of a method of applying molecular ink on a stamp.

Figs. 3(a) through (d) are views for explaining the effect shown by a difference between the chain length of hydrophobic molecules and that of hydrophilic molecules.

Figs. 4(a) through (e) are histograms showing the results of the adhering force between an AFM chip and a sample having micro-contact printed patterns measured in ~~the~~ water through a chemical force microscope.

Fig. 5 shows an image obtained by the observation of micro-contact printed patterns formed in a first example through a chemical force microscope.

Figs. 6(a) through (e) is a schedule drawing showing a first part of the steps of forming micro-contact printed patterns of hydrophobic molecules on a substrate and giving chemical modification to the area of the substrate around the micro-contact printed patterns by hydrophilic molecules according to the present invention ~~mentioned in claim 39~~.

Fig. 7(a) through (b) is a schedule drawing showing a second part of the steps of forming micro-contact printed patterns on a substrate and giving chemical modification to the area of the substrate around the

micro-contact printed patterns following the steps shown in Figs. 6(a) through (e).

Figs. 8(a) and (b) are explanatory drawings of a method of applying molecular ink to a stamp.

Figs. 9(a) and (b) are views for explaining a method of forming micro-contact printed patterns of the present invention utilizing ~~the~~ hydrophobic ~~bond~~ bonding.

Figs. 10 (a) through (e) is a schedule drawing showing a first part of the steps of forming micro-contact printed patterns of hydrophobic molecules on a substrate and giving chemical modification to the area of the substrate around the micro-contact printed patterns by hydrophilic molecules according to the present invention ~~mentioned in claim 41~~.

Figs. 11(a) through (b) is a schedule drawing showing a second part of the steps of forming micro-contact printed patterns of hydrophobic molecules on a substrate and giving chemical modification to the area of the substrate around the micro-contact printed patterns by hydrophilic molecules following the steps shown in Figs. 10(a) and (b).

#### DETAILED DESCRIPTION

Then, a mode of the present invention is explained referring to the drawings.

Referring to Figs. 1(a) through (f), the steps of a first patterning method with micro-contact printing according to the present invention ~~mentioned in claim 1~~ is explained.

First, as shown in Fig. 1(a), a master having projected patterns 1 with a desired height is formed. As materials of master 1 ~~used is~~, silicon or quartz is used or a laminate of a layer of silicon or quartz with a layer of a metal or metal oxide. The projected pattern is ~~of a~~ resist pattern 1a formed on the materials by photolithography or ~~the~~ ionizing radiation lithography

such as electron beam lithography or AFM lithography. The height of the projected pattern 1a is desirably about 1 through 5  $\mu\text{m}$ .


Then, as shown in Fig. 1(b), a resin 2 is applied on the surface of master 1 with the projected pattern, hardened and thereafter as shown in Fig. 1(c), the resin 2 is removed from the ~~stamp~~ master 1, so that a stamp 3 of the resin is formed. ~~Resin~~ The resin of stamp 3 is preferably polydimethylsiloxane (PDMS). The polydimethylsiloxane is cast and hardened to form stamp 3.

Then, as shown in Fig. 1(d), a molecular ink 4 having hydrophobic molecules disposed in a solvent is applied on the stamp 3. Micro-contact printed patterns 6 of hydrophobic molecules are formed on a substrate 5 having ~~the~~ a coating layer of gold, silver or ~~copper~~ copper on the surface of a material such as glass plate by means of stamp 3.


As the molecular ink 4 having hydrophobic molecules dispersed in a solvent used can be an ink including any of molecules having an SH group at the terminal end thereof, silane coupler, or carboxylic acid, sulfonic acid, phosphonic acid, phosphoric acid or acid chloride thereof dispersed in an organic solvent such as ethanol, toluene or methylene chloride or an ethanol solution of an alkanethiol  $\text{CH}_3(\text{CH}_2)_x\text{SH}$  or an ink including molecules having the molecular formula represented by ~~(X having part expressed by any~~ X (any of the under-mentioned structural formula (1) through (7))  $-(\text{CH}_2)_n-$  (part expressed by any of the under-mentioned structural formula (1) through (7))  $-(\text{CH}_2)_m-\text{Y}$  in which  $m$  and  $n \geq 0$  and X is positioned at one end of the molecular formula and is a hydrophobic group and Y is positioned at the other end of the molecular formula and is a group such as  $-\text{SH}$ ,  $-\text{COOH}$ ,  $-\text{SO}_3\text{H}$ ,  $-\text{PO}_3\text{H}$ ,  $\text{PO}_3\text{H}_2$ ,  $-\text{COCl}$ ,  $-\text{SO}_2\text{Cl}$ ,  $-\text{PO}_2\text{Cl}$  or

$\text{PO}_2\text{Cl}_2$  dispersed in an organic solvent such as ethanol, toluene and methylene chloride.


Structural formula (1)




Structural formula (2)




Structural formula (3)




Structural formula (4)




Structural formula (5)

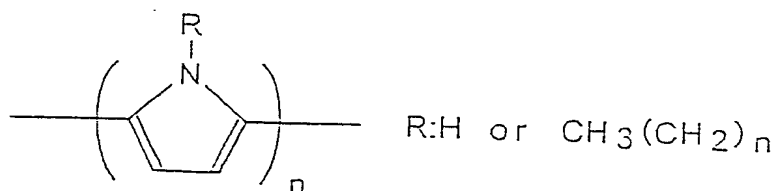

Structural formula (6)

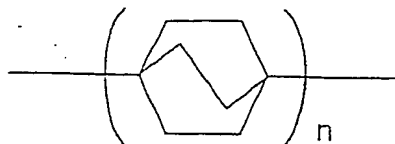

Structural formula (7)



In this case, when a substrate having a coating layer of gold on the surface thereof is used as the substrate, the resolving power can be improved by the effect of self-organization of the molecules included in the molecular ink.


~~As a method~~ Two methods of applying molecular ink 4 on the stamp 3 ~~is given two methods~~ are shown in Fig. 2. AThe method shown in Fig. 2(a) is a wet inking method in which the whole surface of stamp 3 is applied by filling the whole surface of stamp 3 with molecular ink 4. AThe method shown in Fig. 2(b) is a contact inking method in which molecular ink 4 is applied only on the top surface of the projected pattern by pushing the flat surface of a PDMS resin 8 impregnated with molecular ink 4 against the stamp 3. The contact inking method is more excellent in resolving power than ~~in~~ the wet inking method since the diffusion of molecular ink can be reduced in the contact inking method as compared with the wet inking method.

After forming micro-contact printed patterns 6 on substrate 5, the surface of the substrate is dipped in a


hydrophilic molecular solution including hydrophilic molecules dispersed in a solvent which have ~~the~~a chain length shorter than that of hydrophobic molecules included in molecular ink 4, by which chemical modification is given to an area of the surface of the substrate uncovered with micro-contact printed patterns 6, as shown in Fig. 1(f), so that a hydrophilic area 7 of hydrophilic molecules dispersed in the solvent which have a chain length shorter than that of the hydrophobic molecules is formed on an area of the substrate uncovered with the micro-contact printed pattern.

In the present invention, ~~as~~the hydrophilic molecular ink used is a solution including molecules having the molecular formula represented by ~~(X-having part expressed by any~~X (any of the under-mentioned structural formulas (1) through (7))  $-(CH_2)_n-$  (part expressed by any of the under-mentioned structural formulas (1) through (7))  $-(CH_2)_m-Y$  in which  $m$  and  $n \geq 0$  and  $X$  positioned at one end of the molecular formula is a hydrophilic group and  $Y$  positioned at the other end of the molecular formula is a group being able to be connected with substrate such as  $-SH$ ,  $-COOH$ ,  $-SO_3H$ ,  $-PO_3H$ ,  $-PO_3H_2$ ,  $-COCl$ ,  $-SO_3Cl$ ,  $PO_2Cl$  or  $-PO_2Cl_2$  dispersed in an organic solvent such as ethanol, toluene or methylene chloride.


Structural formula (1)




Structural formula (2)




Structural formula (3)




Structural formula (4)




Structural formula (5)

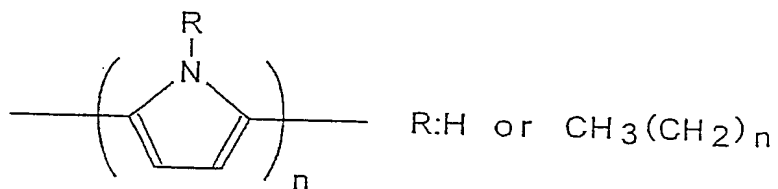

Structural formula (6)



Structural formula (7)

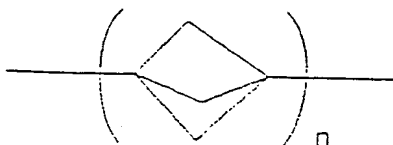

Further, in the method of the present invention, as the hydrophilic molecular solution used can be hydrophilic molecules selected from among molecules having a phosphoric acid group as the hydrophilic group, molecules having a sulfonic acid group as the hydrophilic group, molecules having an amino group as the hydrophilic group, molecules having a hydroxyl group as the hydrophilic group or molecules having a carboxylic acid group as the hydrophilic group dispersed in an organic solvent such as ethanol, toluene or methylene chloride.

Or, in the present invention, as the hydrophilic molecular solution used can be an ethanol solution of  $\text{COOH}(\text{CH}_2)_y\text{-SH}$  having ~~the~~a chain length shorter than the chain length of alkanethiol  $\text{CH}_3(\text{CH}_2)_x\text{-SH}$ .

Accordingly, a hydrophilic area is formed around an area of the micro-contact printed patterns, so that micro-contact printed patterns are formed with ~~the~~a high contrast between the micro-contact printed patterns and an area of the substrate around the micro-contact printed patterns.

In the present invention, if the molecules included in the hydrophobic molecular ink, including hydrophobic molecules dispersed in a solvent, are molecules ~~with~~ ~~molecules~~ having an SH group at their terminal end dispersed in the solvent, a substrate with ~~the~~a top coating layer of gold, silver or ~~copper~~copper is desirably used as the substrate on which the micro-contact printed patterns are formed. In this case, the resolving power is improved by the effect of self-organization.

In the present invention, if the hydrophobic molecular ink including hydrophobic molecules dispersed in the solvent includes a silane coupler or carboxylic acid, sulfonic acid, phosphonic acid, phosphoric acid or acid chloride, a substrate having ~~the~~a top coating layer



of silicon oxide or metal oxide is desirably used as the substrate on which the micro-contact printed patterns are formed. In this case, the resolving power is improved in the same way by the effect of self-organization.

In the present invention, if the hydrophilic molecular ink including hydrophilic molecules dispersed in the solvent includes a silane coupler or carboxylic acid, sulfonic acid, phosphonic acid, phosphoric acid or acid chloride, a substrate having ~~the~~a top coating layer of silicon oxide or metal oxide is desirably used as the substrate on which micro-contact printed patterns are formed. In this case, the resolving power is improved in the same way by the effect of self-organization.

In the present invention, micro-contact printed patterns 6 can be formed of two or more ~~ex~~transfer layers formed using a variety of ink containing different molecules.

In the present invention, as the molecular ink or the hydrophilic molecule solution used can be a molecular ink or ~~the~~hydrophilic molecule solution formed of a polymer.

In the present invention, the micro-contact printed patterns can be formed in the order of micro-contact printed patterns of hydrophobic molecules with longer chain ~~length~~lengths.

Figs. 3(a) through (d) are explanatory drawings showing the effect shown by a difference between the chain length of hydrophobic molecules and that of hydrophilic molecules. As shown in Fig. 3(a), micro-contact printed patterns with gaps 11 are formed on the surface of a substrate using  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$  such that the surface of the substrate with ~~the~~a top coating layer of gold is insufficiently covered with a  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$  ~~molecules~~molecule layer. Thereafter, the surface of the substrate is dipped in a solution of  $\text{COOH}(\text{CH}_2)_{15}\text{SH}$  having

an alkyl group with ~~the~~a chain length longer than that of  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$ , so that chemical modification is given to the area of the surface of the substrate with the top coating layer of gold around the micro-contact printed patterns, wherein molecules of  $\text{COOH}(\text{CH}_2)_{15}\text{SH}$  come in the gaps ll of micro-contact printed patterns as shown in Fig. 3(b). In this case, since the molecule of  $\text{COOH}(\text{CH}_2)_{15}\text{SH}$  is longer than the molecule of  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$ , the COOH group of molecules of  $\text{COOH}(\text{CH}_2)_{15}\text{SH}$  ~~is projected~~projects from between molecules of  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$ . Accordingly, the hydrophilic chemical modification given on an area of the surface of the substrate around the micro-contact printed patterns by  $\text{COOH}(\text{CH}_2)_{15}\text{SH}$  results in the reduction of the contrast between micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns. On the other hand, when chemical modification is given to the area of the surface of the substrate around the micro-contact printed patterns, dipping the surface of the substrate in a solution of  $\text{COOH}(\text{CH}_2)_3\text{SH}$  having a chain length shorter than that of  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$  as shown in Fig. 3(c), the molecules of  $\text{COOH}(\text{CH}_2)_3\text{SH}$  ~~is~~are covered with the molecules of  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$  as shown in Fig. 3(d). Accordingly, the contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns is not reduced.

Figs. 4(a) through (c) are histograms showing the results of the adhering force between an AFM (atomic force microscope) chip with ~~the~~a top coating layer of gold to which chemical modification is given by 1 ml of 1-eicosanethiol and ~~the~~a sample having micro-contact printed patterns measured in ~~the~~water through a chemical force microscope, wherein each coordinate has an orthogonal coordinate system with interaction (nN) as the abscissa and frequency as the coordinate.

Fig. 4(a) shows a histogram of interaction ~~in case that when the~~ micro-contact printed patterns are formed with  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$  and chemical modification is given to the area of the surface of the substrate around the micro-contact printed patterns with  $\text{COOH}(\text{CH}_2)_{15}\text{SH}$ , wherein two peaks approach each other. Accordingly, it is understood that the contrast between the area of the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns is low.

Fig. 4(b) shows a histogram of interaction ~~in case that when the~~ micro-contact printed patterns are formed with  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$  and chemical modification is given to the area of the surface of the substrate micro-contact printed patterns with  $\text{COOH}(\text{CH}_2)_{10}\text{SH}$ , wherein the interval between two peaks ~~become~~ becomes wider as compared with at the case shown in Fig. 4(a). Accordingly, it is understood that the contrast between the area of the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns is somewhat found.

Fig. 4(c) shows histogram of interaction ~~in case that when the~~ micro-contact printed patterns are formed with  $\text{CH}_3(\text{CH}_2)_{11}\text{SH}$  and chemical modification is given to the area of the surface of the substrate around the micro-contact printed patterns with  $\text{COOH}(\text{CH}_2)_3\text{SH}$ , wherein two peaks are ~~distant~~ largely distant from each other. Accordingly, it is understood that the contrast between the area of the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns is apparently found.

As mentioned hereinbefore, in a patterning method ~~with for~~ micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin ~~and thereafter;~~ removing the hardened

resin from the master to make a stamp of the resin; applying a molecular ink including hydrophobic molecules dispersed in a solvent on the stamp ~~and~~; forming micro-contact printed patterns of a hydrophobic molecular layer on a substrate by means of the stamp on which the molecular ink is applied ~~and~~; and dipping the substrate with micro-contact printed patterns in a hydrophilic molecule solution dispersed in a solvent to give chemical modification to the areas of the surface of substrate around the micro-contact printed patterns, a solution including hydrophilic molecules having a chain length shorter than the chain length of hydrophobic molecules included in the molecular ink is used as the hydrophilic molecule solution. However, micro-contact printed patterns may be produced also by a patterning method ~~with~~for micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin ~~and thereafter~~; removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophilic molecules dispersed in a solvent on the stamp ~~and~~; forming micro-contact printed patterns of a hydrophilic molecular layer on a substrate by means of the stamp on which the molecular ink is applied ~~and~~; and dipping the substrate with micro-contact printed patterns in a hydrophobic molecule solution including hydrophobic molecules dispersed in a solvent to give chemical modification to areas of the surface of the substrate around the micro-contact printed patterns, wherein a solution including hydrophobic molecules having a chain length shorter than the chain length of hydrophilic molecules included in the molecular ink is used as the hydrophobic molecule solution.

In this case, ~~the ink mentioned in any of claims 23 through 25 can be used as~~ used can be a molecular ink including hydrophilic molecules dispersed in a solvent.

~~SolutionA solution mentioned in any of claims 26 through 28~~ above can be used as the hydrophobic solution.

Then, referring to Figs. 6(a) through (e), the process of a patterning method ~~with~~ for micro-contact printing of the present invention ~~mentioned in claim 39~~ is explained.

First, as shown in Fig. 6(a), a master 1 having the produced pattern with a desired height is produced. As materials of the master 1 ~~used is~~ used a layer of silicon or quartz or a laminate of a layer of silicon or quartz with a layer of metal or metal oxide. Then, projected patterns are formed with a resist, silicon or quartz metal or oxide ~~thereof~~ nitride thereof 1a by photolithography or ~~the~~ by ionizing radiation lithography such as electron beam lithography or AFM lithography. The height of the projected patterns is desirably about 1 ~~through~~ through 5  $\mu\text{m}$ .

Then, as shown in Fig. 6(b), a resin 2 is applied on the surface of the master 1 having the projected patterns and then the resin 2 is removed from the master 1 by which a stamp 3 made of the resin is formed as shown in Fig. 6(c). Polydimethylsiloxane (PDMS) is preferably used as the resin forming the stamp 3. The stamp 3 is formed after the master by a method comprising the steps of spin-coating the PDMS resin on the surface of the master, hardening the PDMS resin and then removing the hardened resin from the master.


Then, as shown in Fig. 6(d), a molecular ink 14 including hydrophobic molecules dispersed in a solvent is applied on the stamp 3 and micro-contact printed patterns 16 made of hydrophobic molecules are formed on the

surface of the substrate 5 with the top coating layer of gold using the stamp 3.


Ink including any ~~of molecule~~ molecules having an SH group at ~~the~~ a terminal end thereof, silane coupler, or carboxylic acid, sulfonic acid, phosphonic acid, phosphoric acid or acid chloride thereof can be used as the molecular ink 14 including hydrophobic molecules dispersed in a solvent. In this case, when using ~~the~~ a substrate with ~~the~~ a top coating layer of gold as the substrate, the resolving power is improved by the effect of self-organization of molecules included in the molecular ink.

Further, as the hydrophobic molecular ink used can be an ink including molecules having the molecular formula represented by ~~(X<sub>1</sub> having part expressed by any X<sub>1</sub>~~ (any of the under-mentioned structural formulas (1) through (7)) ~~-(CH<sub>2</sub>)<sub>n</sub>- (part expressed by any of the under-mentioned structural formulas (1) through (7))~~ -(CH<sub>2</sub>)<sub>m</sub>-Y<sub>1</sub> in which m and n ≥ 0 and X<sub>1</sub> positioned at one end of the molecular formula is a hydrophobic group and Y positioned at the other end of the molecular formula is a group ~~being able to be connected~~ able to connect with the substrate such as -SH, -COOH, SO<sub>3</sub>H, -PO<sub>3</sub>H, -PO<sub>3</sub>H<sub>2</sub>, -CoCl, -SO<sub>3</sub>Cl, PO<sub>2</sub>Cl or -PO<sub>2</sub>Cl<sub>2</sub> dispersed in an organic solvent such as ethanol, toluene or methylene chloride.


Structural formula (1)




Structural formula (2)




Structural formula (3)




Structural formula (4)




Structural formula (5)

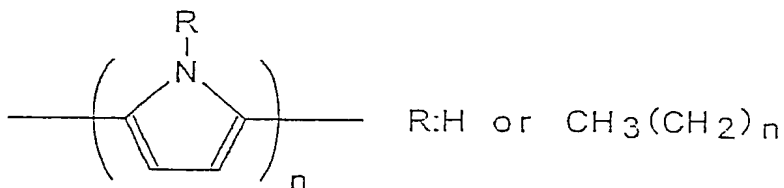

Structural formula (6)



Structural formula (7)



There are two methods ~~as of~~ applying ~~methods~~ of molecular ink 14 on the stamp 3 as shown in Figs. 8(a) and (b). A method shown in Fig. 8(a) is a wet inking method in which the whole surface of the stamp 3 is applied by filling the whole surface of the stamp 3 with a molecular ink 4. A method shown in Fig. 2(b) is a contact inking method in which the molecular ink 4 is applied only on the top surface of projected pattern by pushing the flat surface of the PDMS resin 8 impregnated with molecular ink 4 against the stamp 3. The contact inking method is more excellent in resolving power than ~~in~~ the wet inking method since the diffusion of molecular ink can be reduced in the contact inking method as compared with the wet inking method.

Then, as shown in Fig. 7(a), the substrate 5 with micro-contact printed patterns 16 is dipped in water 9. Hydrophobic molecules forming micro-contact printed patterns 16 are ~~hydrophobic-bonded~~ hydrophobically-bonded with each other to form the assembly of hydrophobic molecules. Accordingly, faultless micro-contact printed patterns are formed.

Then, chemical modification is given to an area of the surface of the substrate 5 uncovered with the micro-contact patterns 16 made of molecules ~~hydrophobic-bonded~~ hydrophobically-bonded using a solution of  $\text{COOH}(\text{CH}_2)_Y\text{-SH}$  dispersed in water or solution of  $\text{COOH}(\text{CH}_2)_Y\text{-SH}$  dispersed in KOH aqueous solution. Accordingly, a hydrophilic area 17 is formed around the micro-contact printed patterns without damaging the hydrophobic property of the area of hydrophobic micro-contact printed patterns, so that the micro-contact printed patterns can be formed with ~~the~~ a high contrast between the micro-contact printed patterns and the areas of the substrate around the micro-contact printed patterns.



Further in a patterning method ~~with~~for micro-contact printing of the present invention, a chemical modification is given to the surface of the substrate around the micro-contact printed patterns by a hydrophilic molecular ink in ~~the~~water, and thereafter further chemical modification can be given ~~with~~at a high degree to the area of the surface of the substrate around the micro-contact printed patterns with hydrophobic molecules.

Fig. 9 is a view explaining the effect of a patterning method ~~with~~for micro-contact printing of the present invention utilizing hydrophobic-~~bond~~bonding. Fig. 9(a) shows schematically a hydrophobic molecular layer 160 formed by dipping the formed micro-contact printed patterns 16 in the water in the state of assembly of hydrophobic molecules ~~hydrophobic~~hydrophobically-bonded with each other. As apparent from this, an area of the micro-contact printed patterns 16 is covered with an assembled hydrophobic molecular layer 160 so that micro-contact printed patterns having few defects are formed. Namely, the film of micro-contact printed patterns 16 is formed without exposing the surface of the substrate under the micro-contact printed patterns.

Then, chemical modification is given to the area of the surface of the substrate around the micro-contact printed patterns 16 using a solution of  $\text{COOH}(\text{CH}_2)_Y-\text{SH}$  dispersed in water or a solution of  $\text{COOH}(\text{CH}_2)_Y-\text{SH}$  dispersed in KOH aqueous solution. Accordingly, a hydrophilic area 17 is formed around the micro-contact printed patterns without damaging the hydrophobic property of the area of the hydrophobic micro-contact printed patterns as shown in Fig. 9(b), so that the micro-contact printed patterns 16 can be formed with ~~the~~high contrast between the micro-contact printed patterns 16 of the hydrophobic molecular layer 160 and

the areas of the substrate around the micro-contact printed patterns 16.

Further, in the above-~~mentioned~~mentioned invention, hydrophilic chemical modification is given to ~~the~~an area of the surface of the substrate around the micro-contact printed patterns and then further chemical modification can be given ~~with~~at a high degree to an area of the micro-contact printed patterns using hydrophobic ink in an alcoholic solution or hydrophobic molecules can be transferred on the micro-contact printed patterns using the stamp having hydrophobic ink applied thereon. Parts of defects of the micro-contact printed patterns are mended perfectly in the second process.

Micro-contact printed patterns can be observed using an AFM (atomic force microscope) chip with ~~the~~a top coating layer of gold to which chemical modification is given by 1 ml of 1-eicosanethiol by means of a chemical force microscope.

Then, referring to Figs. 10(a) through (e), a patterning method ~~with~~for micro-contact printing of the present invention ~~mentioned in claim 4~~ is explained.

First, as shown in Fig. 10(a), a master 1 having projected patterns ~~with~~of a desired height is formed. As materials of the master 1 ~~used~~is used silicon or quartz or a laminate of a layer of silicon or quartz with a layer of a metal or metal oxide. The projected pattern is formed of a pattern of a resist, silicon or quartz with a layer of a metal or metal oxide or metallic nitride 1a. The height of the projected patterns 1 is desirably about 1 through 5  $\mu\text{m}$ .

Then, as shown in Fig. 10(b), a resin 2 is applied on the surface of master 1 having projected patterns 1a, hardened and then the hardened resin 2 is removed from the master 1 so that the stamp 3 made of resin is formed as shown in Fig. 10(c). Polydimethylsiloxane (PDMS) is

preferably used as the resin forming the stamp 3. The stamp is formed after the master by a method comprising the steps of spin-coating the PDMS resin on the surface of the master, hardening the PDMS resin and then removing the hardened resin from the master.

Then, as shown in Fig. 10(d), a molecular ink 24 including hydrophilic molecules dispersed in a solvent is applied on the stamp 3 and micro-contact printed patterns 26 made of hydrophilic molecules are formed on the surface of the substrate 5 with ~~the~~a top coating layer of gold.

~~Ink~~The ink including molecules positioned opposite molecules connected to the substrate and selected from among molecules having phosphoric acid, molecules having a phosphonic acid group, or molecules having an amino group, and molecules having a hydroxyl group dispersed in a solvent can be used as the hydrophilic molecular ink 24. In this case, when using a substrate with ~~the~~a top coating layer of silicon oxide or metal oxide, the resolving power is improved by the effect of self-organization.

As a method of applying the molecular ink 24 on the stamp 3 is given two methods of a wet inking method and a contact inking method, as mentioned in the description on a patterning method ~~with~~for micro-contact printing of the present invention mentioned ~~in claim 39~~above. The contact inking method is more excellent in resolving power than ~~in~~the wet inking method since the diffusion of molecular ink can be reduced in the contact inking method as compared with the wet inking method.

Then, as shown in Fig. 11(a), a substrate 5 having micro-contact printed patterns 26 is dipped in an organic solution 28. Since an organic solution 28 is difficult to ~~be mixed~~mix with hydrophilic molecules forming the micro-contact printed patterns 26 and hydrophilic

molecules are cohered by hydrogen ~~bond~~bonding with each other, the probability that hydrophobic molecules ~~are adhered~~adhere to micro-contact printed patterns in the process of chemical modification being given to the area of the surface of the substrate around the micro-contact printed patterns in a solution including the hydrophobic molecules is low. Accordingly, the area ~~27~~ to which chemical modification is given is formed around the micro-contact printed patterns without damaging the hydrophilic property of the area of hydrophilic micro-contact printed patterns, so that micro-contact printed patterns with ~~thea~~ a high contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns can be formed.

In the above-mentioned invention, after chemical modification is given by an organic solution including the hydrophobic molecular ink, the second chemical modification can be further given to micro-contact printed patterns in an alcoholic solution of hydrophilic molecular ink or hydrophilic molecules can be transferred on the micro-contact printed patterns using a stamp on which the hydrophilic molecular ink is applied. In the second process, parts of defects in the micro-contact printed patterns can be perfectly mended.

Micro-contact printed patterns formed as above-mentioned can be observed using an AFM (atomic force microscope) chip with ~~thea~~ a top coating layer of gold to which chemical modification is given by 1 ml of 1-eicosanethiol by means of a chemical force microscope.

In the above-mentioned invention, in a patterning method ~~withfor~~ for micro-contact printing comprising the steps of: applying a resin on a master 1 having projected patterns, hardening the resin and thereafter removing the hardened resin from the master 1 to make a

stamp 3 of the resin; applying a hydrophilic molecular ink including hydrophilic molecules dispersed in a solvent on the stamp 3~~and~~; forming micro-contact printed patterns 26 formed of a hydrophilic molecular layer on ~~at~~the substrate by means of the stamp on which the hydrophilic molecular ink is applied~~and~~; and dipping the substrate with the micro-contact printed patterns in hydrophilic molecular solution including hydrophilic molecules dispersed in the solvent to give chemical modification 27 to areas of the surface of the substrate around the micro-contact printed patterns, wherein after forming the micro-contact printed patterns 26, second chemical modification 27 is given to the areas of the surface of the substrate around the micro-contact printed patterns 26 by the hydrophilic molecular ink in the water.

According to the above-mentioned method of the present invention, printed ~~product~~products can be obtained which are provided with micro-contact printed patterns formed of hydrophobic molecular layers formed on a substrate using a molecular ink including hydrophobic molecules dispersed in a solvent and hydrophilic molecular layers formed on the area of the surface of the substrate around the micro-contact printed patterns, wherein the chain length of the hydrophilic molecules is shorter than the chain length of the hydrophobic molecules.

Further, instead of producing the printed product as mentioned hereinbefore, a printed product can be also obtained by a patterning method ~~with~~for micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin and thereafter removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophilic molecules dispersed in a solvent on

the stamp;~~and~~ forming micro-contact printed patterns of the hydrophilic molecular layer on a substrate by means of the stamp on which the hydrophilic molecular ink is applied~~and~~; and dipping the substrate with micro-contact printed patterns in a hydrophilic molecule solution including hydrophilic molecules dispersed in a solvent to give chemical modification to areas of the surface of the substrate around the micro-contact printed patterns, wherein after forming the micro-contact printed patterns, chemical modification is given to the areas of the surface of the substrate around the micro-contact printed patterns by the hydrophobic molecular ink in the organic solution.

In this case, after giving chemical modification to the areas of the surface of the substrate around the micro-contact printed patterns by the hydrophobic molecular ink in the organic solution, chemical modification can be further given to the micro-patterns at ~~the~~ a higher density to the micro-contact printed patterns in an alcoholic solution or hydrophilic molecules may be again transferred on the micro-contact printed patterns using a stamp filled with hydrophilic molecules. In the second process, parts of defects in the micro-contact printed patterns can be perfectly mended.

Further, as a hydrophobic molecular ink including hydrophobic molecules dispersed in a solvent can be used a hydrophobic molecular ink ~~mentioned in any of claims 45, 46 and 50~~ above.

Further, as a hydrophilic molecular ink including hydrophilic molecules dispersed in a solvent can be used a hydrophilic molecular ink including hydrophilic molecules dispersed in a solvent ~~mentioned in any of claims 47, 48 and 51~~ above.

Then, a patterning method ~~with~~for micro-contact printed printing of the present invention is explained further in detail giving examples.

(Example 1)

First, a thin film of chromium was formed on a surface of a quartz plate by ~~the~~a sputtering method. Resist patterns with ~~the~~a thickness of 4000Å were formed on the quartz plate with ~~the~~a thin film of chromium to form a master with a height on the surface of the quartz plate with the thin film of chromium. PDMS resin was spin-coated or cast on the surface of the master with resist patterns and was heat-treated at 65°C for four hours to be hardened. Thereafter, the hardened PDMS resin was removed from the master to form a stamp. Then, a molecular ink including an ethanol solution of  $\text{CH}_3(\text{CH}_2)_{19}\text{SH}$  was applied on the stamp by the contact inking method.

On the other hand, a substrate with an evaporation layer of gold on a glass plate was provided. The stamp having the molecular ink on the surface thereof was pressed against the surface of the substrate by which the molecular ink was transferred to the substrate. Thereby, micro-contact printed patterns were formed.

Then, chemical modification was given to the area of the surface of the substrate around the micro-contact printed patterns using an ethanol solution of  $\text{COOH}(\text{CH}_2)_{10}\text{SH}$  so that a printed product is formed.

Fig. 5 shows an image of the printed product observed through the chemical force microscope. In Fig. 5, A indicates the hydrophobic area and B indicates the hydrophilic area.

(Comparative Example)

The same process as in Example 1 was carried out for the formation of micro-contact printed patterns except a molecular ink of an ethanol solution of  $\text{CH}_3(\text{CH}_2)_{10}\text{SH}$  was

used instead of the molecular ink of an ethanol solution of  $\text{CH}_3(\text{CH}_2)_{19}\text{SH}$  for the formation of micro-contact printed patterns and  $\text{COOH}(\text{CH}_2)_{20}\text{SH}$  was used instead of an ethanol solution of  $\text{COOH}(\text{CH}_2)_{10}\text{SH}$  for the chemical modification given to the area of the surface of the substrate around the micro-contact patterns. However, resolution of the micro-contact patterns was impossible since the contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns was low.

(Example 2)

First, a thin film of chromium was formed on a surface of a quartz plate by the sputtering method. Resist patterns with ~~the~~a thickness of  $4000\text{\AA}$  were formed on the quartz plate with ~~the~~a thin film of chromium to form a master with a height on the surface of the quartz plate with the thin film of chromium. PDMS resin was spin-coated on the surface of the master with the resist patterns and was heat-treated at  $65^\circ\text{C}$  for four hours to be hardened. Thereafter, the hardened PDMS resin was removed from the master to form a stamp. Then, a molecular ink including an ethanol solution of  $\text{CH}_3(\text{CH}_2)_{19}\text{SH}$  was applied on the stamp by the contact inking method.

On the other hand, a substrate with an evaporation layer of gold on a glass plate was provided. The stamp having the molecular ink on the surface thereof was pressed against the surface of the substrate so that the molecular ink was transferred to the substrate. Thereby, micro-contact printed patterns were formed.

Then, the substrate with the micro-contact printed patterns was dipped in ~~the~~water so that  $\text{CH}_3(\text{CH}_2)_{19}\text{SH}$  was ~~hydrophobic~~hydrophobically-bonded to be cohered. Then, chemical modification was given to the area of the surface of the substrate around the micro-contact printed patterns using an aqueous solution of  $\text{COOH}(\text{CH}_2)_{10}\text{SH}$  under



the above-mentioned state. Thereby, a printed product with a high contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed ~~patterns~~patterns was formed.

(Example 3)

After forming ~~of~~the printed product according to the Example, chemical modification by hydrophobic molecules was again given to the micro-contact printed patterns using a stamp filled with hydrophobic ink. In the second process, parts of defects in the micro-contact printed patterns can be perfectly mended. Thereby, a printed product with a further higher contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed ~~patterns~~patterns was formed.

(Example 4)

According to Example 2, after chemical modification of the area of the surface of the substrate around the micro-contact printed patterns by hydrophilic molecules, further chemical modification was given to the micro-contact printed patterns at ~~the~~a higher density by hydrophobic molecules included in an alcoholic solution of hydrophobic molecules. In this process, parts of defects of the micro-contact printed patterns ~~was~~were perfectly mended so that a printed product having ~~the~~a further higher contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns could be obtained.

(Example 5)

The same process as in Example 4 was carried out except a substrate having a coating of silicon oxide thereon was ~~used~~as the substrate and an ethanol solution of  $\text{OH}(\text{CH}_2)_{10}\text{COOH}$  was used as the molecular ink,

in which micro-contact printed patterns of hydrophilic molecules was formed on the substrate.

Then, the substrate having the micro-contact printed patterns was dipped in a benzene solution of  $\text{CH}_3(\text{CH}_2)_{10}\text{COOH}$  and in this state, chemical modification by  $\text{CH}_3(\text{CH}_2)_{10}\text{COOH}$  was given to the surface of the substrate around the micro-contact printed patterns so that a printed product having ~~thea~~ high contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns was formed.

(Example 6)

After forming the printed product according to Example 3, chemical modification of the hydrophilic molecules was again given to the micro-contact printed patterns using a stamp filled with a hydrophilic ink. In this process, parts of defects of the micro-contact printed patterns were perfectly mended so that a printed product having ~~thea~~ further higher contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns could be obtained.

(Example 7)

After chemical modification by hydrophilic molecules ~~being~~was given to the area of the surface of the substrate around the micro-contact printed patterns in the water according to Example 5, further chemical modification was given to the micro-contact printed patterns at ~~thea~~ higher density in an alcoholic solution. In this process, parts of defects of the micro-contact printed patterns were perfectly mended so that a printed product having ~~thea~~ further higher contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns could be obtained.

As mentioned hereinbefore according to the invention ~~mentioned in claim 1~~, in a patterning method ~~with~~for micro-contact printing comprising the steps of: applying a resin on a master having projected patterns, hardening the resin and thereafter removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophobic molecules dispersed in a solvent on the stamp; ~~and~~ forming micro-contact printed patterns formed of a hydrophobic molecular layer on a substrate by means of the stamp on which the molecular ink is applied ~~and~~; dipping the substrate with micro-contact printed patterns in a hydrophilic molecule solution dispersed in a solvent to give chemical modification to the areas of the surface of the substrate around the micro-contact printed patterns, the solution including the hydrophilic molecules having a chain length shorter than the chain length of the hydrophobic molecules included in the molecular ink is used as the hydrophilic molecule solution. According to this, a printed product having ~~the~~a contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns can be briefly formed.

Further, as mentioned ~~in claim 20~~above, in a patterning method ~~with~~for micro-contact printing comprising the steps of: applying resin on a master having projected patterns, hardening the resin and thereafter removing the hardened resin from the master to make a stamp of the resin; applying a molecular ink including hydrophilic molecules dispersed in a solvent on the stamp; ~~and~~ forming micro-contact printed patterns of the hydrophilic molecular layer on a substrate by means of the stamp on which the molecular ink is applied ~~and~~; and dipping the substrate with micro-contact printed patterns in a hydrophobic molecule solution including

hydrophobic molecules dispersed in a solvent to give chemical modification to areas of the surface of the substrate around the micro-contact printed patterns, the solution including hydrophobic molecules having a chain length shorter than the chain length of the hydrophilic molecules included in the molecular ink is used as the hydrophobic molecule solution. According to this patterning method, a printed product having micro-contact printed patterns with ~~the~~a high contrast between the micro-contact printed patterns and the area of the surface of the substrate around the micro-contact printed patterns can be also similar formed. Further, since it is unnecessary to increase the density of the ink to get rid of defects from the micro-contact printed patterns in forming the micro-contact printed patterns, the reduction of the resolving power produced by ~~run~~running and ~~spread~~spreading of the ink can be avoided.

Further, according to a patterning method ~~with~~for micro-contact printing of the present invention ~~mentioned in claim 39~~, since after forming the micro-contact printed patterns of the hydrophobic molecular layer formed on a substrate using a molecular ink including hydrophobic molecules dispersed in a solvent, chemical modification is given to the areas of the surface of the substrate around the micro-contact printed patterns by the hydrophilic molecular ink in the water under the state that the hydrophobic molecules are ~~hydrophobic~~hydrophobically-bonded with each other, the probability of hydrophilic molecules coming in the hydrophobic molecular layer is low. As a result, the contrast between the micro-contact printed patterns ~~chemical~~chemically-modified by the hydrophilic molecules and the area of the surface of the substrate around the micro-contact printed patterns can be obtained without

damaging the hydrophobic property of the micro-contact patterns.

Further, according to a patterning method ~~with~~for micro-contact printing mentioned ~~in claim 4~~above, after forming the micro-contact printed patterns of a hydrophilic molecular layer formed on a substrate using a molecular ink including hydrophilic molecules, chemical modification is given to the areas of the surface of the substrate around the micro-contact printed patterns by ~~the~~a hydrophobic molecular ink in an organic solution. Accordingly, the probability of hydrophobic molecules coming in the hydrophilic molecular layer is low. As a result, the contrast between the micro-contact printed patterns ~~chemical~~chemically-modified by the hydrophilic molecules and the area of the surface of the substrate around the micro-contact printed patterns can be obtained without damaging the hydrophilic property of the micro-contact patterns.

Printed ~~product~~products of the present invention can be utilized for the connection of specified molecules, immobilization of ~~enzyme~~enzymes, ~~cell~~cells or DNA and others, utilizing the combination of different properties of surfaces in the printed products.